

HOTSY Guns

Designed exclusively for Hotsy to meet the demands of the high pressure cleaning professional.



- **PSI: 5000**
- **GPM: 10.5**
- **Temperature: 320°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20 oz

Part No.	Description
8.751-235.0	Hotsy Gun
8.751-119.0	Hotsy Gun Repair Kit



- **PSI: 3750**
- **GPM: 12**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 24 oz



Part No.	Original No.	Description
8.711-345.0	860447	Hotsy Gun
8.717-658.0	877471	Hotsy Gun Repair Kit



- **PSI: 4500**
- **GPM: 10**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 26 oz



Part No.	Original No.	Description
8.711-346.0	691867	Hotsy Gun
8.717-660.0	753179	Hotsy Gun Repair Kit

AP740 Trigger Gun

Extra value!



- **PSI: 4000**
- **GPM: 8**
- **Temperature: 320°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 13.4 oz

Part No.	Original No.	Description
8.710-417.0	353030	MV2005

Superior quality inline gun, especially well suited for high reach applications.



- **PSI: 4000**
- **GPM: 10.5**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21.9 oz

Linear

Part No.	Original No.	Description
8.704-141.0	109797	Repair Kit-Linear 2 Gun

Legacy AP1000 Trigger Gun



The World's most popular and easy to repair gun!!!



- **PSI: 4500**
- **GPM: 12**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 19 oz

Part No.	Original No.	Description
8.704-157.0	109856	Unitized Valve
8.704-158.0	109857	Unitized Valve (Weep)
8.704-159.0	109858	Trigger Seal Kit

Power performance with comfort and durability.



- **PSI: 5000**
- **GPM: 11.5**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 23 oz

Part No.	Original No.	Description
8.710-416.0	353025	Model 2500
8.704-173.0	109950	Unitized Valve
8.704-174.0	109960	Trigger Seal Kit

Trigger Gun



- **PSI: 4000**
- **GPM: 7**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 17 oz

Part No.	Description
8.710-420.0	MV920
8.749-249.0	Repair Kit

J.E. Adams Trigger Gun



Vented handle for Cooler Operation.



- **PSI: 4500**
- **GPM: 12**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 25.64 oz

5030NP

Part No.	Original No.	Description
8.710-391.0	722923	Adams 5030NP
8.700-294.0	722925	Repair Kit

Giant Trigger Guns



The Original "Heavy weight".



- **PSI: 5000**
- **GPM: 10**
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 29.28 oz

21290C

Part No.	Original No.	Description
8.710-394.0	725740	21290C - Brass Outlet
8.710-392.0	691810	21250B - SS Outlet
8.722-172.0	753020	Repair Kit

Suttner Trigger Guns



High pressure and fatigue free "relax action" design.



- **PSI: 5000**
- **GPM: 12**
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21 oz

ST-2605

Part No.	Original No.	Description
8.710-376.0	728401	ST-2605
8.701-673.0	753016	Unitized Valve, Repair Kit

Extreme durability with easy pull trigger.



- **PSI: 5000**
- **GPM: 12**
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21 oz

ST-2305

Part No.	Original No.	Description
8.710-386.0	728395	ST-2305
8.701-673.0	753016	Unitized Valve, Repair Kit
8.701-674.0	089851	Unitized Weep Valve, Repair Kit

Ceramic Unitized Ball Valve



- Ceramic ball
- Highly resistant against nearly all soaps and acids
- Will fit in ST-2300, 2305, 2605, 2700 spray guns as a repair kit

Part No.	Description
8.749-907.0	Ceramic Unitized Ball Valve

Suttner Trigger Guns (continued)

The handle style for "Big Hands".



- **PSI: 4000**
- **GPM: 12**
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 26 oz

ST-2000

Part No.	Original No.	Description
8.710-388.0	728394	ST-2000
8.701-663.0	753021	Unitized Valve, Repair Kit
8.701-665.0	089631	Unitized Weep Valve, Repair Kit

The perennial favorite for general pressure washer applications.



- **PSI: 5000**
- **GPM: 12**
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20.5 oz

ST-1500

Part No.	Original No.	Description
8.710-384.0	691811	ST-1500
8.710-385.0	352236	ST-1500 w/ Weep
8.701-663.0	753021	Unitized Valve
8.701-665.0	089631	Unitized Weep Valve

15° offset angle thru gun for easier overhead use.



- **PSI: 4000**
- **GPM: 12**
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 23 oz

ST-601

Part No.	Original No.	Description
8.710-370.0	352201	ST-601
8.701-663.0	753021	Unitized Valve, Repair Kit

Relax action design, **STAINLESS STEEL** gun.



- **PSI: 5000**
- **GPM: 12**
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21 oz

ST-2700

Part No.	Original No.	Description
8.710-389.0	352243	ST-2700
8.701-658.0	089070	Unitized Valve, Repair Kit

PA Trigger Guns



- **PSI: 5000**
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 26 oz

RL30 – YG5000

Part No.	Original No.	Description
8.710-377.0	352221	RL30-YG5000
8.704-616.0	111976	Repair Kit



- **PSI: 5000**
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 27.5 oz

Vega 5000

Part No.	Original No.	Description
8.710-378.0	352222-5	Vega 5000
8.710-379.0	352222W	Vega Weep Gun
8.704-232.0	110550	Valve Kit Vega
8.704-615.0	111950	Repair Kit

Easy Hold Trigger, Stainless Steel Compensating.



- **PSI: 6400**
- **GPM:** 10.5
- **Temperature:** 320°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 30 oz

Orange Nova

Part No.	Original No.	Description
8.704-617.0	111980	Repair Kit Orange Nova

Easy pull and easy to hold with matching blue lance.



- **PSI: 5650**
- **GPM:** 8
- **Temperature:** 320°F
- 3/8" FPT inlet x 1/4" BSP outlet
- Weight: 23.3 oz
- Blue vent grip, stainless steel lance has 1/4" BSP threads

RL-55 Blue & Lance



Part No.	Original No.	Description
8.710-446.0	353250	RL-55 Blue Gun
8.710-645.0	368440PB	40" SS lance w/ blue vent grip
8.704-610.0	111814	Repair Kit- RL-55

PA Trigger Guns (continued)



- **PSI: 3200**
- **GPM:** 8
- **Temperature:** 320°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 10 oz

RL20

Part No.	Original No.	Description
8.710-440.0	353207	RL20
8.704-180.0	109993	Repair Kit

MV Hobby Wash Gun



Excellent Light-duty gun.



- **PSI: 1850**
- **GPM:** 5
- **Temperature:** 180°F
- 1/4" M inlet x 1/4" F outlet
- Weight: 8.4 oz

Hobby Wash Gun

Part No.	Original No.	Description
8.710-419.0	353040	Hobby Wash Gun

NOTE: See page 36 for Hobby Unit parts

MV 950 Gun



- **PSI: 4500**
- **GPM:** 8
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20 oz

Part No.	Original No.	Description
8.704-194.0	110030	Valve Kit

Mecline Guns



Easy Pull, Easy Hold!



- **PSI: 5000**
- **GPM:** 8
- **Temperature:** 302°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20 oz

AL 35

Part No.	Original No.	Description
8.710-434.0	353110	AL 35 - Blue
8.710-435.0	353111	AL 35 - Yellow
8.720-563.0	AL016650016	Repair Kit



Mecline Guns (continued)

Easy pull trigger.



AL 19

- **PSI: 4500**
- **GPM:** 8
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20 oz

Part No.	Original No.	Description
8.720-563.0	AL016650016	Repair Kit



AL 5

- **PSI: 4060**
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 25 oz

Part No.	Original No.	Description
8.710-432.0	353100	AL 5
8.720-561.0	AL01165006	Repair Kit

Big Guns



Model RL124

- **PSI: 1950**
- **GPM:** 32
- **Temperature:** 210°F
- 1/2" FPT inlet / outlet
- Weight: 44 oz



Model RL84 "Big Black Gun"

- **PSI: 7250**
- **GPM:** 21
- **Temperature:** 210°F
- 1/2" SS FPT inlet / outlet
- Weight: 60.3 oz



Model RL204

- **PSI: 3200**
- **GPM:** 53
- **Temperature:** 210°F
- 3/4" F inlet / 1/2" outlet
- Weight: 47.5 oz



ST-3002 Stainless Steel Gun

- **PSI: 7250**
- **GPM:** 26
- **Temperature:** 300°F
- 1/2" plated steel FPT inlet / outlet
- Weight: 42.5 oz



Part No.	Original No.	Description
8.723-874.0		Model RL124
8.740-165.0		Model RL204
8.725-421.0		Repair Kit - Model RL124
8.749-327.0		Repair Kit - Model RL204
8.704-136.0	109775	Repair Kit - Model 100
8.704-612.0	111900	Repair Kit - Model 160

Part No.	Original No.	Description
8.710-445.0	353246	Model RL84
8.750-459.0		Repair Kit
8.701-677.0	089876	Repair Kit (Includes Seal Kit)
8.701-676.0	089875	Seal Kit

Big Stainless Steel Lances & Side Handles

For big guns shown above.



- **PSI: 4050**
- **Temperature:** 300°F

- High pressure stainless steel pipe
- Complete with adjustable handle & coupler for 1/4" MPT nozzle
- 1/2" MPT gun connection
- Schedule 40 pipe

Part No.	Original No.	Description
8.904-081.0	352902A	20" Lance w/ Handle
8.904-083.0	352904A	40" Lance w/ Handle
8.904-086.0	352906A	Side Handle Only
8.710-411.0		39", SS, 8700 PSI 300°F Inlet 1/2" MNPT, Outlet 1/4" MNPT

Open Guns

Just plain comfortable!



- **PSI: 4500**
- **GPM: 12**
- **Temperature: 302°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21.5 oz

Part No.	Original No.	Description
8.710-398.0	352602	Model 2500 Open Gun

Durable Glass Reinforced Handle.



- **PSI: 4000**
- **GPM: 12**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Tubular Flow-Thru internals for high pressure and efficiency
- Weight: 16.7 oz

Part No.	Original No.	Description
8.710-396.0	352600	Legacy AP1000 Open Gun



- **PSI: 4000**
- **GPM: 7**
- **Temperature: 300°F**
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 12.2 oz

Part No.	Original No.	Description
8.710-425.0	353050	AP740 Open Gun

Flow Thru Guns



- Pistol grip gun handle
- Tough polyurethane insulation
- Cushion grip - red or black
- Full grip or slim line handle (See specs below)

Part No.	Original No.	Description
8.710-399.0	352605	Full Red Grip 3/8" FPT x 1/4" FPT
8.710-400.0	352606	Full Black Grip 3/8" FPT x 1/4" FPT

Gun Handle w/ 18" Lance

8.710-403.0	352614	Slim Red Grip 1/4" M x 1/4" F
8.710-404.0	352616	Full Red Grip 3/8" F x 1/4" M

AP Dump Gun



Water continues to run through the tube even when trigger gun is closed.



- **PSI: 3000**
- **GPM: 10.5**
- **Temperature: 140°F**
- 3/8" FPT inlet x 1/8" FPT outlet

AP Single Lance Dump Gun

Part No.	Original No.	Description
8.710-405.0	352810	Dump Gun 16" Lance
8.710-406.0	352812	Dump Gun 40" Lance
8.704-169.0	109905	Repair Kit

Dump Gun

Industrial duty dual-lance.




- **PSI: 3000**
- **GPM: 10**
- **Temperature: 200°F**
- 3/8" FPT inlet x 1/8" FPT outlet

Dual Lance Dump Gun

Part No.	Original No.	Description
8.710-408.0	352820	Dump Gun w/ 36" Lance
8.700-311.0	075296	Repair Kits

HOTSY Dual Lance

The Hotsy dual lance simply out classes the competition. 35" and 48" length to meet UL Standards. Designed specifically for Hotsy to our specifications.

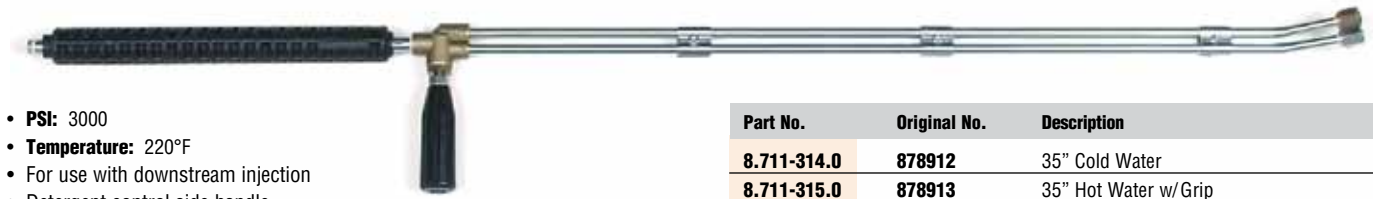

- **PSI:** 3000
- **Temperature:** 220°F
- For use with downstream injection
- Detergent control side handle

Part No.	Original No.	Description
8.711-314.0	878912	35" Cold Water
8.711-315.0	878913	35" Hot Water w/ Grip
8.711-313.0	878911	48" Hot Water w/ Grip
8.717-662.0	877600	Repair Kit
8.711-316.0	878918	Brass Body
8.717-268.0	861420	Handle, Valve

HOTSY Hot Water Lance



Hotsy quality through and through. Superior heat protection with zytel insulated grips.



- **PSI:** 4000
- **Temperature:** 220°F
- 1/4" plated steel pipe
- 1/4" threads
- Zytel insulated grips

Part No.	Original No.	Description
8.711-274.0	936610	15" Lance w/ Grip
8.711-312.0	878910	36" Lance w/ Nozzle Protector
8.711-269.0	878917	36" Lance w/ Grip & Side Handle
8.725-388.0	936647	48" Lance w/ Grip & Side Handle
8.710-677.0	936642	60" Lance w/ Grip
8.710-683.0	936643	79" Lance w/ Grip

HOTSY Cold Water Lances



- **PSI:** 3000
- 1/4" plated steel pipe
- 1/4" threads

Part No.	Original No.	Description
9.802-214.0	936701	36" Lance w/ Side Handle
8.711-272.0	768391	48" No Side Handle, 4000 PSI

Lance Extension



- **PSI:** 3000
- 1/4" plated steel pipe
- Extends standard Lance to make cleaning easier
- Includes socket and plug

Part No.	Original No.	Description
8.904-419.0	244085	36" Plated Steel Lance

HOTSY Lance Grip



- Easily fastened to any 1/4" wand
- 12" in length
- Zytel material for long life

Part No.	Original No.	Description
8.717-661.0	859762	12" Insulated Grip

HOTSY Side Handle



Side handle easily adjusts to provide a safe, ergonomic addition to any straight Lance.



- Easily attaches to metal lances
- Fits 1/4" lances

Part No.	Original No.	Description
8.706-670.0	859763	Wand Side Handle

Dual Lances

Premium lance with stainless steel inserted seat.



AL Premium Dual Lance

- **PSI:** 3600
- **GPM:** 10.5
- **Temperature:** 302°F
- 1/4" tubing
- Vented grip
- 1/4" male inlet - female outlet

AL Basic Dual Lance

- **PSI:** 3600
- **GPM:** 10.5
- **Temperature:** 300°F
- 1/4" male inlet - female outlet
- 1/8" Zinc plated tubes
- Square molded grip inlet

Part No.	Original No.	Description
8.710-722.0	368925	Stainless Steel Pipe
9.803-267.0	AL8355VPKIT	Repair Kit
8.710-724.0	368927	Basic Dual Lance
8.720-548.0	AL004650300	Repair Kit
8.904-360.0*	368926X	AL Premium Deluxe w/Quick Coupler & Soap Nozzle

Dual Lances



Interpump Dual Lance

- **PSI:** 3000
- **GPM:** 10
- **Temperature:** 220°F
- Excellent for down stream injector
- Zinc-plated for chemical resistance
- Brass & stainless steel valve w/ Viton seals
- Side handle valve adjustment

Part No.	Original No.	Description
8.710-612.0	726598	36" Standard
8.710-621.0	368172	72" Extended
8.904-277.0*	368151X	36" Deluxe Standard
8.904-281.0*	368173X	72" Deluxe Extended
8.900-135.0	084072X	Valve Repair Kit

*Deluxe Lances

Include Hardened Steel QC Inlet Plug, 1/8" 40 x 65 degree Soap Nozzle and Top Quality Quick Coupler. See lances with deluxe noted above.

Suttner Push & Pull Lance



Vented grip can be pushed and pulled up to 90 degrees. For hard to reach applications, such as gutters, fenders, trucks, and heavy equipment.



- 3050 PSI
- 300°F
- 34" SS lance

Part No.	Original No.	Description
8.710-711.0	368880	ST-85 Push & Pull Lance

Suttner Dual Lances



ST-54 w/ Side Handle

- **GPM:** 10
- **Temperature:** 300°F
- Zinc / chromate finish
- 38" total length

ST-53 w/ Knob

- Molded grip
- High pressure thin wall tubing
- Weight: 42 oz

Part No.	Original No.	Description
8.710-613.0	368153	ST-53 w/ Knob (4000 PSI)
8.710-614.0	368154	ST-54 w/ Side Handle (4500 PSI)
8.701-594.0	086884	Repair Kit (ST-53)
8.900-153.0	086883X	Clamp Kit (ST-53/54)
8.701-602.0	086907	Repair Kit (ST-54)

Dual Trigger Lance

Unique Design – Go from High Pressure to Low Pressure (Rinse to Soap) with a pull of the trigger. Use with separate Trigger Gun or as an Open Gun, and still change from High to Low.



- **PSI:** 3600
- **GPM:** 12
- **Temperature:** 300°F
- Zinc-plated steel tubes
- Stainless steel seat
- Includes nozzle protector
- Weight: 39 oz

Part No.	Original No.	Description
8.710-617.0	368158	48" Dual Trigger Lance
8.900-781.0	109490	Seal Kit

Spray-Flex™ Flex Wand

Gives easy access to difficult spots, great for cleaning engines, roofs, eaves or underneath almost anything! Holds its' shape under pressure.



- **PSI:** 3000 or 5000
- **Temperature:** 190°F
- 90° flexibility

Part No.	Original No.	Description
8.710-597.0	368117	Spray-Flex™ Flex Wand - 3000 PSI
8.710-596.0	368116	Spray-Flex™ Flex Wand - 5000 PSI



*Discover the
Intelligent Approach
to LANCES*

*High Quality Performance at a
Lower Cost*

The all-new Legacy Lance was created with your business in mind. Now you can get the high quality performance you've come to expect from Legacy branded products at a price that will help you achieve increased value at a lower cost.

The new Legacy Lances feature:

- Stainless steel or chrome plated steel pressure tubing
- Rated at 5250 PSI work pressure
- 4:1 pressure safety factor
- Solid molded polymer square construction grips
- Vent grip glass filled polyamide construction

Square Molded Grip Lances



- **PSI:** 5250
- **Temperature:** 300°F
- 1/4 Inch male Inlet and Outlet
- High Quality Chrome Plate Finish
- Solid molded polymer construction handle with hollow rib grip for increased heat dissipation

Part No.	Length
8.752-898.0	12"
8.752-899.0	20"
8.752-900.0	24"
8.752-901.0	28"
8.752-902.0	36"
8.752-903.0	48"
8.752-904.0	60"
8.752-905.0	79"

Vented Lances



- **PSI:** 5250
- **Temperature:** 300°F
- **Nozzle Protector Included**
- Handle made from molded glass filled polyamide for heat dissipation with hollow insulators for increased heat venting
- 1/4 Inch Male Inlet 1/4 Inch Female Outlet
- 4:1 Safety factor

Part No.	Length
Stainless Steel	
8.752-868.0	20"
8.752-869.0	24"
8.752-871.0	36"
8.752-872.0	48"
8.752-873.0	60"
8.752-874.0	79"
Chrome-plated	
8.752-875.0	20"
8.752-876.0	24"
8.752-878.0	36"
8.752-879.0	48"
8.752-880.0	60"
8.752-881.0	79"

Legacy Oval Molded Grip Lances



- **PSI:** 5250
- **Temperature:** 300°F
- 1/4 Inch male Inlet and Outlet
- 4:1 Safety Factor
- Stainless Steel or High Quality Chrome Plate Finish
- Solid molded polymer construction handle with hollow rib grip for increased heat dissipation

Part No.	Length
Stainless Steel	
8.752-882.0	12"
8.752-883.0	20"
8.752-884.0	24"
8.752-885.0	28"
8.752-886.0	36"
8.752-887.0	48"
8.752-888.0	60"
8.752-889.0	79"
Chrome-plated	
8.752-890.0	12"
8.752-891.0	20"
8.752-892.0	24"
8.752-893.0	28"
8.752-894.0	36"
8.752-906.0	36" with handle
8.752-895.0	48"
8.752-907.0	48" with handle
8.752-896.0	60"
8.752-897.0	79"

Legacy Superlite SS Dual lance



Superlite stainless steel with nozzle guard.



Dual Lance w/ Nozzle Guard

- **PSI:** 4000
- **Temperature:** 200°F
- Side handle/ Valve actuator
- Viton seal
- Forged brass valve body
- 1/4" MPT inlet
- 1/8" SS outlet tubing

Part No.	Original No.	Description
8.710-618.0	368160	36" - 37.8 oz
8.710-620.0	368165	72" - 56.0 oz
8.900-781.0	109490	Seal Kit

AP Uninsulated Lances



Stainless steel or corrosion-resistant bright zinc-plated lances made with 1/4" tubing.



- **PSI:** 4100
- **Temperature:** 300°F
- Superior strength rolled threads
- 1/4" high pressure, lightweight, thin wall tubing

Part No.	Original No.	Length
Stainless Steel		
8.710-623.0	368212	12"
8.710-624.0	368220	20"
8.710-625.0	368224	24"
8.710-626.0	368228	28"
8.710-627.0	368236	36"
8.710-628.0	368248	48"
8.710-629.0	368260	60"
8.710-630.0	368278	78"

Part No.	Original No.	Length
Zinc-plated		
8.710-631.0	368312	12"
8.710-632.0	368320	20"
8.710-633.0	368324	24"
8.710-634.0	368336	36"
8.710-635.0	368348	48"
8.710-636.0	368360	60"
8.710-637.0	368378	78"

NOTE: For 15° bend at Lance Discharge, Place "BND" at end of the Original Number

MV Lance Handle



- Use on all 1/4" lances
- Easily positioned without removal of nozzle

Part No.	Original No.	Description
8.704-162.0	109873	1/4" Lance Handle

Lance Handles / Accessories

Vented Grip, Side Handle with Nut and Vented Grip with Side Handle can be user-attached to Uninsulated Lances or 1/4" Steel Pipe – Detachable & Reusable.



Part No.	Original No.	Description
8.710-717.0	368909P	Vent Grip Only (14" long)
8.904-357.0	368909PS	Grip with Side Handle
8.904-358.0	368920P	Side Handle with Nut



Part No.	Original No.	Description
8.710-716.0	368909	Vent Grip Only (14" long) ST-9
8.710-719.0	368911	Grip with Side Handle
8.710-720.0	368920	Side Handle with Nut

Adjustable Nozzle Holder



- **PSI:** 5700 / GPM: 10
- Perfect for cleaning hard to reach areas like inside containers or gutters
- Nozzle position locks with pressure
- **Temperature:** 300°F
- Stainless Steel
- 1/4" female inlet

Part No.	Description
8.749-905.0	Outlet 1/4" FNPT
8.749-906.0	Outlet 1/4" Male

Flex Lances

Flexes a full 180° and returns, saving broken wand repairs.



- **PSI:** 2000
- **Temperature:** 200°F
- Prevents bent lances & broken hose
- Industrial grade polyurethane flex section
- Perfect for self-serve car wash bays
- 1/4" galvanized pipe end sections

Part No.	Original No.	Description
8.710-598.0	368118	18", 1/4" MPT x 1/4" MPT
8.710-603.0	368121	21", 1/4" MPT x 1/8" FPT
8.710-604.0	368124	24", 1/4" MPT x 1/8" FPT



Fiberglass Telescoping Lance



High quality telescoping lance reaches up to 24', 3 sizes to choose from. Lightweight and balanced under pressure.

- **PSI:** 3500
- **Temperature:** 200°F
- 6' - 12' Lance shown

Extension Wand Control Kit below (Part No. 8.749-848.0) fits this lance.



Belt and pole clamp

Part No.	Original No.	Description	Length	PSI
8.710-589.0	728589	Long!	6' - 12'	3500
8.710-590.0	936641	Longer!!	6' - 18'	3500
8.710-591.0	728591	Longest!	8' - 24'	3500
8.700-059.0	056008	Strap & Belt Shoulder Harness		
Replacement Guns				
8.723-896.0		TS12 Replacement Gun		
8.710-595.0	368098	TS18 Replacement Gun		
8.739-434.0	368099	TS24 Replacement Gun		

Extension Wand Control Kit



8.749-848.0

- Effortlessly raise and lower the wand using the water pressure
- Adjustable pressure
- No kick back or whipping action
- Easy grip handle
- Easy to install and control
- Right or left hand adjustable
- Durable, reliable, and light weight
- Reduce fatigue and time on the job

Part No.	Description
8.749-848.0	Extension Wand Control Kit

Gutter Cleaner Attachment

Easily quick connect to any lance or extension wand to clean gutters or hard to reach areas. Angle improves reach and expands cleaning capabilities.



- **PSI:** 3500
- **Temperature:** 200°F
- Zinc Plated
- Inlet 1/4" M plug
- Inlet 1/4" F QC

Part No.	Description
8.711-324.0	1/4" Nipple x 1/4" QC

Hobby Gun, Lance & Hose

Don't turn away hobby unit owners. Complete replacement hose, gun and lance!



9.711-285.0

8.711-531.0

9.802-223.0

Part No.	Original No.	Description
9.802-223.0	4-011137	Insulated Lance w/ Gun
9.802-220.0	4-011106	Lance w/ Coupler (Not Shown)
8.711-285.0	4-011105	Lance w/ #3 Hi/Low Varifan Nozzle
8.711-531.0	4-02010025M	1/4" x 25' Thermoplastic Hose, 22mm both ends

NOTE: See page 42 for more Hobby Hoses

X-Jet Long Range Nozzle



8.710-474.0

- Projects water and chemical up to 40'
- Chemicals bypass pump, lance, hose and gun for damage protection
- Includes 15' hose with inline shut-off valve and color coded proportioners

Part No.	Original No.	Description	PSI
8.710-474.0	360103	X-Jet Long Range Nozzle	2000-3000
8.710-475.0	360104	X-Jet Long Range Nozzle	3000-4000
8.710-473.0	360102	M5 X-Jet Variable Fan Long Range Nozzle	2000-3000

Pressure Washer Accessory Kit



- Kit 1 - 3000 PSI Includes:**
- Teflon Tape
 - Hose, 3000 PSI 3/8 x 50', R1, SoxSw
 - QC Nozzle, SS 1/4" #4.0x15
 - Coupler, 3/8" Female brass
 - Wand, 18" M22 x 1/4" QC
 - Gun, S2 3/8" Inlet, Lance w/M22 coupler
- Kit 2 - 5000 PSI Includes:**
- Teflon Tape
 - Hose, 5000 PSI 3/8 x 50', R2, SoxSw
 - QC Nozzle, SS 1/4" #4.0x15
 - Coupler, 3/8" Female brass
 - Wand, 18" M22 x 1/4" QC
 - Gun, S2 3/8" Inlet, Lance w/M22 coupler

Part No.	Description
8.903-454.0	Pressure Washer Accessory Kit 1
8.903-455.0	Pressure Washer Accessory Kit 2

Replacement Accessories



- **PSI: 4000**
- **Temperature:** 300°F
- M22 - 1 "O" Ring inlet (Standard)
- M22 - 2 "O" Ring outlet (Extended)



Astra Style

Part No.	Original No.	Description
8.710-428.0	353070	Astra Style, 10.5 GPM
8.710-429.0	353075	Iride Style, 8 GPM

Iride Style

Maintenance Kits

8.704-173.0	109950	Unitized Valve
8.704-174.0	109960	Trigger Seal Kit

Kew Replacement Accessories



Iride Kew Style

- **PSI: 4000**
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" F inlet
- Bayonet Quick Coupler Outlet



Extended Twist Seal Coupler

- **PSI:** 3600
- **GPM:** 11
- **Temperature:** 300°F
- Double O-ring Seal
- Machined Brass Body
- High Impact Plastic Knob

Part No.	Original No.	Description
8.709-535.0	331215	Coupler 1/4" FPT x 22mmF
8.709-555.0	331315	Plug 1/4" FPT x 22mmM

Tip Retainer

Fits vent grip lance and other nozzles.



Tip Retainer Style

- 18mm Thread
- Fits vent grip lance & other nozzles
- See tip jet nozzles in nozzle section

Part No.	Original No.	Description
8.710-901.0	373065	Tip Retainer



Bayonet Plug

- 416 Stainless Steel Plug attaches any 1/4" lance to Kew Guns

Part No.	Original No.	Description
8.710-903.0	373069	SS Plug w/ set back threads

Tip-Jet Nozzle System



Tip-Jet Tips

- **PSI:** to 4000
- Neat & simple tip change
- Hardened stainless steel tips with vanes
- Strainers available
- Body components available in brass, zinc-plated steel or stainless steel

"Tip-Jet" Nozzle Systems are versatile nozzling systems for everyday or specialized applications.

Nozzle Size	0° Part No.	0° Orig No.	15° Part No.	15° Orig No.	25° Part No.	25° Orig No.	40° Part No.	40° Orig No.
3.0	8.708-016.0	253316	8.708-017.0	253317N	8.708-018.0	253318	-	-
4.0	8.708-019.0	253330	8.708-020.0	253331	8.708-021.0	253332	8.708-022.0	253333
4.5	8.708-023.0	253338	8.708-024.0	253339	8.708-025.0	253340	8.708-026.0	253341
5.0	8.708-027.0	253346	8.708-028.0	253348	8.708-029.0	253349	8.708-030.0	253350
5.5	8.708-031.0	253355	8.708-032.0	253357	8.708-033.0	253358	8.708-034.0	253359
6.0	8.708-035.0	253365	8.708-036.0	253367	8.708-037.0	253368	8.708-038.0	253369

Nozzle Size	0° Part No.	0° Orig No.	15° Part No.	15° Orig No.	25° Part No.	25° Orig No.	40° Part No.	40° Orig No.
6.5	8.708-039.0	253375	-	-	8.708-040.0	253377	8.708-041.0	253378
7.0	8.708-042.0	253383	8.708-043.0	253385	8.708-044.0	253386	8.708-045.0	253387
7.5	8.708-046.0	253392	8.708-047.0	253393	8.708-048.0	253394	8.708-049.0	253395
8.0	8.708-050.0	253400	8.708-051.0	253401	8.708-052.0	253402	8.708-053.0	253403
9.0	8.708-054.0	253415	8.708-055.0	253416	8.708-056.0	253417	8.708-057.0	253418
10.0	8.708-058.0	253456	8.708-059.0	253457	8.708-060.0	253458	8.708-061.0	253459

NOTE: See page 59 for strainers and body components